

OPzS Series

C&R Opzs Series Lead Acid batteries are designed with a combination of die-casting Tubular positive framework and superfluous electrolyte technologies to offer a very high level of reliability and a long service life. Opzs batteries used special filter and proof design to ensure no acid fog runs over and burning proof, and also convenient examine and maintenance.

General Features

- Maintenance convenient.
- Non-Spillable construction design.
- Transparent containers, convenient to observe.
- Special filter installation for acid fog proof.
- Higher quality and high reliability.
- Super long service life.
- Special pole sealed technology.

Application

- Electric Utility
- Security System
- Railroad Utility
- Cable Television
- Alternative Energy System
- Control Equipment
- Telecommunications
- Medical Equipments
- UPS
- Photovoltaic System



Construction

Component	Positive	Negative	Container	Cover	Terminal	Separator	Electrolyte
Raw material	Lead dioxide	Lead	AS	AS	Copper	Ruber-PVC	Sulfuric acid

Performance Characteristics






Battery Model	Opzs 2-250			
Designed Life	15 Years			
Capacity(25°C)	24HR(12.9A,1.85V)	10HR(25A,1.80V)	5HR(43A,1.77V)	1HR(132.5A,1.67V)
	310AH	250AH	215AH	132.5AH
Dimensions	Length	Width	Height	Total Height
	124mm(4.88inch)	206mm(8.11inch)	354mm(13.94inch)	409mm(16.1inch)
Approx. Weight	Without electrolyte:16.2Kg (35.7 lbs)		With electrolyte:20.8Kg (45.9 lbs)	
Internal Resistance	Full charged at 25°C: 0.0008 Ohm			
Self Discharge	3% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	2.3V-2.35V(-5mV/ °C), max. Current: 50A		2.25-2.27V(-3.3mV/ °C)	

Constant Current Discharge Ratings-Amperes at 77°F(25°C)

TIME	1HR	3HR	5HR	10HR	24HR	48HR	72HR	96HR	120HR	240HR
CU-TOFF VOLTAGE	1.67	1.75	1.77	1.80	1.85	1.85	1.85	1.85	1.85	1.85
CAPACITY(AH)	132.5	187.5	215	250	310	335	350	352	355	365

Constant Power Discharge Ratings-Watts at 77°F (25°C)

TIME	1HR	3HR	5HR	10HR	24HR	48HR	72HR	96HR	120HR	240HR
CU-TOFF VOLTAGE	1.67	1.75	1.77	1.80	1.85	1.85	1.85	1.85	1.85	1.85
CAPACITY(WH)	230.7	361	422	473	530	572	616	620	625	642

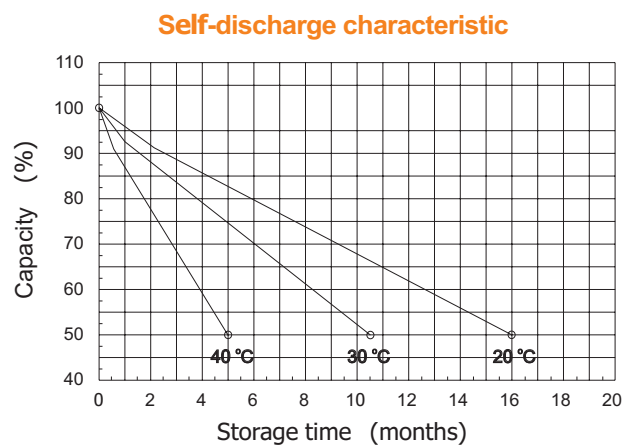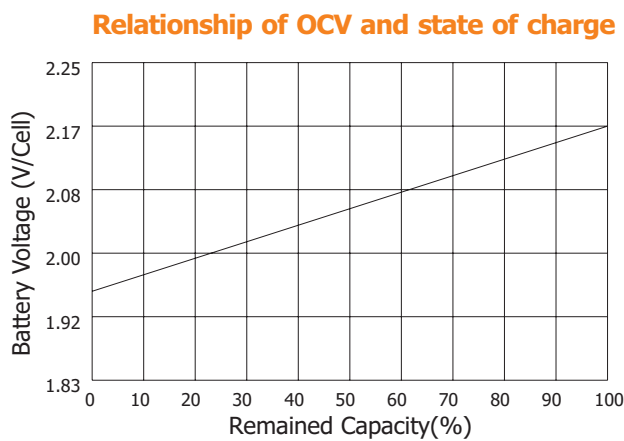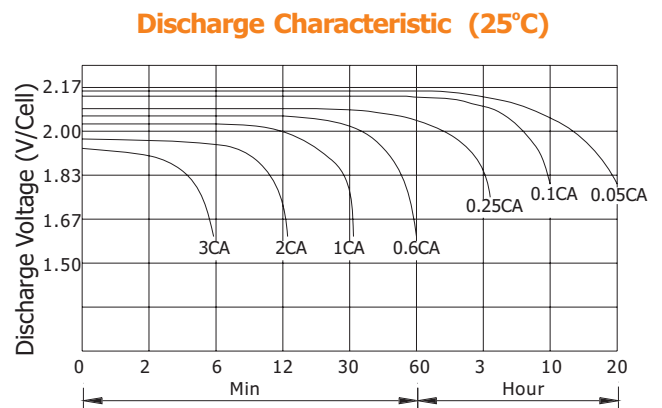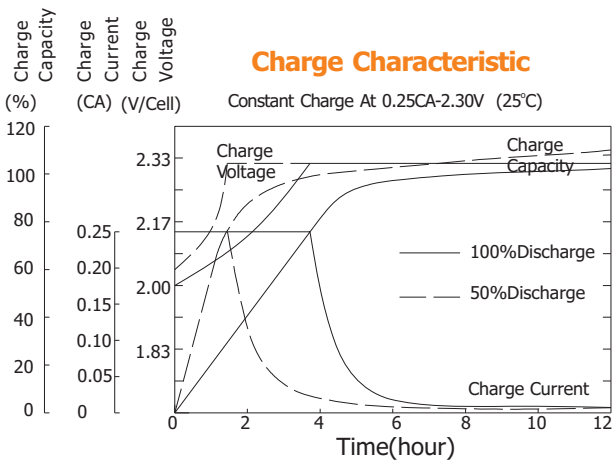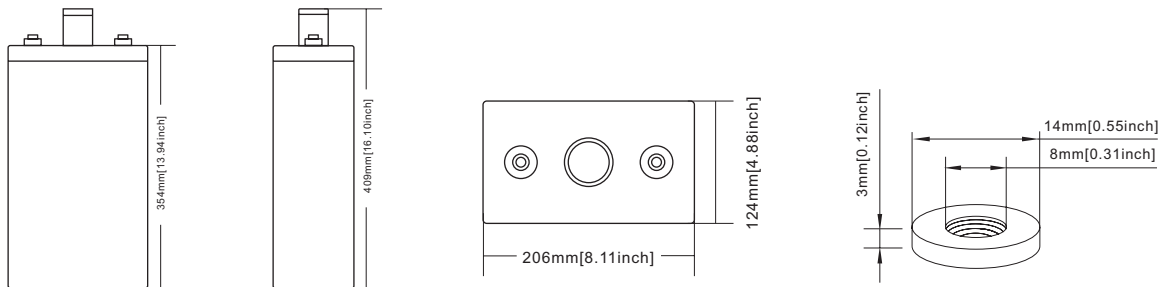

SUNRUI Electro-Tech Company Limited.

Rm.1516,shejiBuilding,Zhenhua Rd.,Futian,ShenZhen China.

Postal Code: 518031.

Tel:(+86-755)83788480

Website: www.sumrum.com

Fax:(+86-755)83788006

E-mail: sales@sumrum.com

